


WATER HEATERS AND PUFFERS

WACN_S

Puffer with single fixed coil from 300 L to 1500 L

Treated interior, painted exterior.
 made of carbon steel and lined with soft polyurethane insulation, thickness 100mm and PVC exterior finish.

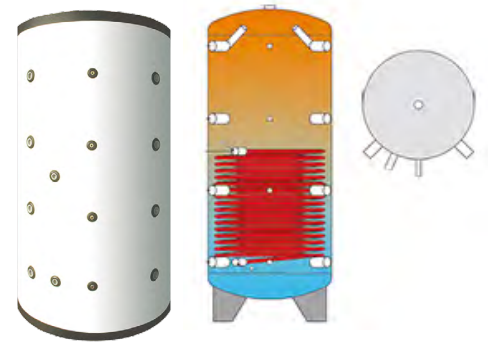

MODEL		WACN300S	WACN500S	WACN800S	WACN1000S	WACN1250S	WACN1500S
Useful volume	L	270	476	710	920	1095	1410
Energy class/dissipation	w	C 93W	C 110W	C 131W	C 143W	C 153W	C 167W
Total height with insulation	mm	1635	1775	1800	2190	2095	2165
Max. height straightening	mm	1630	1750	1840	2200	2100	2110
Outer diameter	mm	700	850	990	990	1100	1200
Lower exchanger	m2	1.8	1.8	2.6	2.6	3.8	3.8
Lower coil water cap.	L	10.4	10.4	14.6	14.6	21.6	21.6
Power consumption	kW	43	45	65	68	95	99
Req. flow rate to coil	m3/h	1.9	1.9	2.8	2.9	4.1	4.2
Water prod. 80°/60°(DIN4708)	m3/h	1.1	1.1	1.6	1.7	2.3	2.4
Pressure drops	mbar	67	73	208	228	645	700
Flange	Ø mm	290/200					
Unladen weight	kg	104	140	176	196	243	266
Max. op. press. of heat.	bar	3					
Max. op. press. exchanger	bar	10					
Max. op. temp.	°C	95					
CODE		00014WA04S	00014WA05S	00014WA06S	00014WA07S	00014WA08S	00014WA09S