

## Window type Syntek - Cooling

Immediate and simple room cooling is possible owing to ultra-compact solutions such as window type air conditioners in ecological R32 gas from the Syntek range.

The air conditioner designed specifically for the **summer air conditioning** of containers and prefabs is **hermetically sealed** and, therefore, features not only easy installation but also easy use owing to the practical **on-board control** that manages the various functions.


Ideal for prefabricated buildings, mobile offices.



Window Type



## Window type Syntek - Cooling

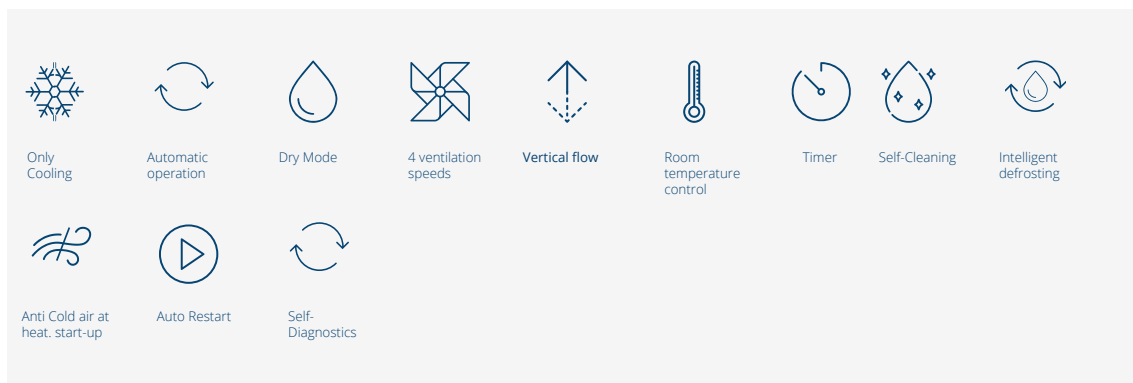

MODEL	I.U.	SKWTV 0916 GCL32	SKWTV 1216 GCL32	
Power supply	V/Ph/Hz	230/1/50		
Seasonal efficiency in Cooling	Pdesign	kW	2.70	3.70
	SEER		5.20	5.40
	Annual energy consump.	kWh/a	182	240
	Energy Label		A	A
Nominal cooling capacity	kW	2.7	3.65	
	BTU/h	9212	12454	
Nominal cooling power input (min-max)	kW	782	1030	
EER		3.45	3.54	
Air flow volume (max-med-min)	m³/h	400-360-320	480-430-380	
Internal side sound pressure (max - med - min)	dB(A)	50-48-46	50-48-46	
External side sound pressure (max - med - min)	dB(A)	56-54-52	58-56-54	
Internal side sound power (max - med - min)	dB(A)	59-57-55	59-57-55	
External side sound power (max - med - min)	dB(A)	65-63-61	65-63-61	
Dimensions (H x W x D)	mm	375x560x708	428x660x700	
Net weight	kg	43	50	
Refrigerant type / Standard charge	type/kg	R32 / 0.51	R32 / 0.63	
Global warming potential / Tons CO <sub>2</sub> equivalent	GWP/tons	675 / 0.344	675 / 0.425	
Refrigerant charge / tons	kg	0.51 / 0.344	0.63 / 0.425	
Heating/cooling ambient operating temp. range	°C	16 - 43	16 - 43	
<b>CODE</b>		<b>2405000</b>	<b>2405001</b>	