



Jolly Comfort - Double pipe air conditioner without outdoor unit




The double pipe air conditioner without outdoor unit is designed for all applications where a product with simple and reliable operation is required with easy installation methods suitable for the most varied applications. The features that make it unique on the market are:

- High performance and low consumption;
- 800W integrative electrical resistance to guarantee operation at low temperatures;
- Removable front panel in ABS;
- Machine structure in galvanized and painted steel;
- Standard remote control;
- Ease of installation

Specially designed for residential/commercial applications and solutions such as prefabricated modules, B&Bs, schools, historic centers and all those applications where a versatile and simple to install product is required.

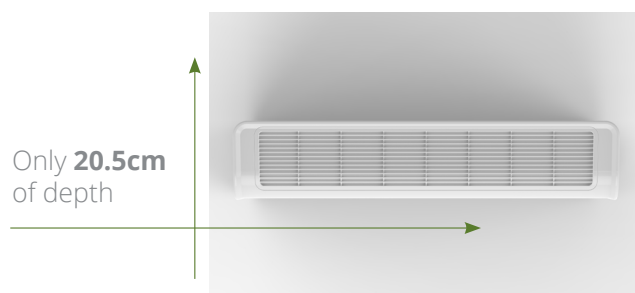

Jolly Comfort - Double pipe air conditioner without outdoor unit

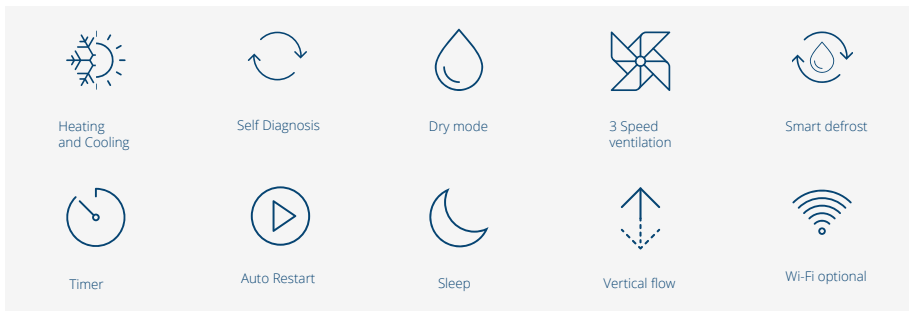

Climatizzatore Jolly Comfort

Telecomando di serie



MODELLO	U.I.	SKU 1001 SHP-90
Power supply	V/f/Hz	230/1/50
Seasonal efficiency in cooling mode	SEER	2,60
	Annual energy consumption kWh/60min	1,1
	Energy label	A
Seasonal efficiency in heating mode Average/warmer climate	SCOP	3,60
	Annual energy consumption kWh/60min	0,7
	Energy label	A+
Nominal cooling capacity (min-max)	kW	2,93 (1,00÷3,52)
	BTU/h	10000 (3412÷12010)
Nominal cooling power input (min-max)	kW	1,12
Nominal heating capacity (min-max)	kW	2,63 (0,70÷3,52)
	BTU/h	9000 (2380÷12010)
Nominal heating power input (min-max)		0,73
Supplementary electrical resistance	kW	0,80
Unit air flow volume (max-med-min)	m³/h	550/450/350
Internal side sound pressure (max-min)	dB(A)	47/39
Internal side sound power (max-min)	dB(A)	58/53/49
Outer side sound pressure	dB(A)	55
Outer side sound power	dB(A)	65
Wall holes diameter	mm	180
Dimensions (HxLxD)	mm	585x1000x205
Net weight	kg	42,5
Refrigerant gas (type / standard charge)	tipo/kg	R290 / 0,290
Global Warming Potential / CO2 equiv.tons		3 / 0,001
Internal operating temperature min-max riscald./condiz.	°C	-3÷28 / 18÷35
External operating temperature min-max riscald./condiz.	°C	-5÷24 / -5÷43
CODE	U.I.	2405006

ACCESSORIES SUPPLIED AS STANDARD (in support)

Plastic sheets for ducts	Grill kits	Wall suspension bracket

OPTIONAL ACCESSORIES	CODE
Wi-Fi Module	2405016

Installation kit ready!

This product contains R290 refrigerant and must be installed, used and/or stored in a room with a floor area greater than 15 square meters.

The above technical data refers to european standards EN14511 and EN14825. Outdoor units contain fluorinated greenhouse gases governed by the Kyoto protocol.