



Jolly Comfort - Double pipe air conditioner without outdoor unit




The double pipe air conditioner without outdoor unit is designed for all applications where a product with simple and reliable operation is required with easy installation methods suitable for the most varied applications. The features that make it unique on the market are:

- High performance and low consumption;
- 800W integrative electrical resistance to guarantee operation at low temperatures;
- Removable front panel in ABS;
- Machine structure in galvanized and painted steel;
- Standard remote control;
- Ease of installation

Specially designed for residential/commercial applications and solutions such as prefabricated modules, B&Bs, schools, historic centers and all those applications where a versatile and simple to install product is required.

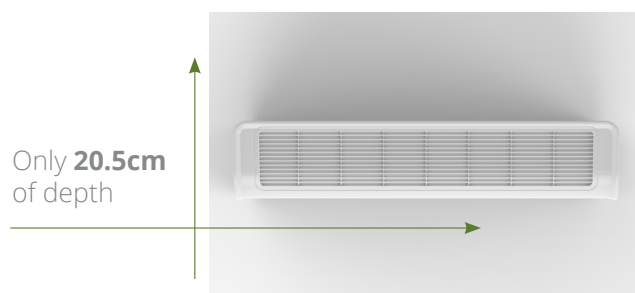

Jolly Comfort - Double pipe air conditioner without outdoor unit

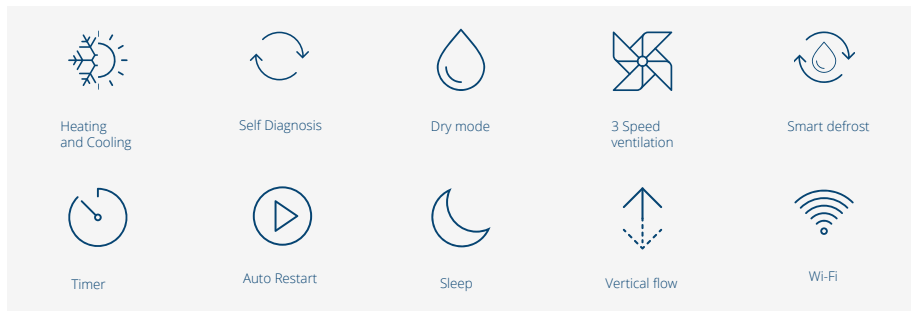

Climatizzatore Jolly Comfort

Telecomando di serie

MODELLO	U.I.	SKU 1001 SHP-90
Power supply	V/f/Hz	230/1/50
Seasonal efficiency in cooling mode	SEER	2,60
	Annual energy consumption kWh/60min	1,1
	Energy label	A
Seasonal efficiency in heating mode Average/warmer climate	SCOP	3,60
	Annual energy consumption kWh/60min	0,7
	Energy label	A+
Nominal cooling capacity (min-max)	kW	2,93 (1,00÷3,52)
	BTU/h	10000 (3412÷12010)
Nominal cooling power input (min-max)	kW	1,12
Nominal heating capacity (min-max)	kW	2,63 (0,70÷3,52)
	BTU/h	9000 (2380÷12010)
Nominal heating power input (min-max)		0,73
Supplementary electrical resistance	kW	0,80
Unit air flow volume (max-med-min)	m³/h	550/450/350
Internal side sound pressure (max-min)	dB(A)	47/39
Internal side sound power (max-min)	dB(A)	58/53/49
Outer side sound pressure	dB(A)	55
Outer side sound power	dB(A)	65
Wall holes diameter	mm	180
Dimensions (HxLxD)	mm	585x1000x205
Net weight	kg	42,5
Refrigerant gas (type / standard charge)	tipo/kg	R290 / 0,290
Global Warming Potential / CO2 equiv.tons		3 / 0,001
Internal operating temperature min-max riscald./condiz.	°C	-3÷28 / 18÷35
External operating temperature min-max riscald./condiz.	°C	-5÷24 / -5÷43
CODE	U.I.	2405006W



ACCESSORIES SUPPLIED AS STANDARD (in support)		
Plastic sheets for ducts	Grill kits	Wall suspension bracket

Installation kit ready!

This product contains R290 refrigerant and must be installed, used and/or stored in a room with a floor area greater than 15 square meters.

The above technical data refers to european standards EN14511 and EN14825. Outdoor units contain fluorinated greenhouse gases governed by the Kyoto protocol.