

## WATER HEATERS AND PUFFERS

## WATER HEATERS AND ACCESSORIES

### WACN\_PU

## Puffer for chilled water and heating from 50 L to 500 L

Treated interior, painted exterior.  
made of carbon steel and lined with stiff, injected insulation, thickness 50mm and PVC exterior finish.




MODEL		WACN 25PU	WACN 50PU	WACN 100PU	WACN 200PU	WACN300PU	WACN500PU
Useful volume	L	24	57	123	203	277	473
Energy class/dissipation		A 19 W	B 34W	B 50W	C 68W	C 82W	C 114W
Total height with insulation	ZZmm	450	935	1095	1395	1560	1855
Maximum height in straightening	mm	590	1050	1250	1550	1700	2000
Outer diameter 50 mm PU stiff inj.	XX Ø mm	380	400	500	550	600	700
Unladen weight	kg	11,5	25	35	45	55	100
Max. op. press. of heat.	bar	6					
Max. water heater operating temp.	°C	95					
CODE		00014WA00P	00014WA01P	00014WA02P	00014WA03P	00014WA04P	00014WA05P

### WACN\_PU

## Puffer for chilled water and heating from 800 L to 2000 L

Treated interior, painted exterior.  
made of carbon steel and coated with armaflox insulation thick. 30mm and PVC exterior finish.

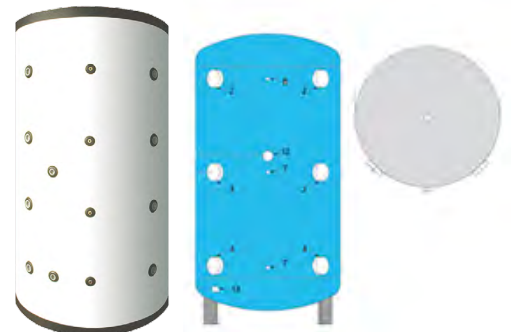

MODEL		WACN 800PU	WACN 1000PU	WACN 1500PU	WACN 2000PU
Useful volume	L	732	855	1420	2013
Energy class/dissipation		471 W	528 W	726 W	913 W
Total height with insulation	ZZmm	1725	1975	2090	2405
Maximum height in straightening	mm	1840	2200	2110	2530
Outer diameter 30 mm PEXL	XX Ø mm	850	850	1060	1160
Unladen weight	kg	170	190	240	330
Max. op. press. of heat.	bar	6			
Max. water heater operating temp.	°C	95			
CODE		00014WA06P	00014WA07P	00014WA09P	00014WA10P